


# West Dual Spreaders



- Low power requirement
- Up to 21m spread
- Easy access steps
- Spreads all products from slurry to solids
- Hydraulically controlled feed rate
- Large moving side wall
- Optional splash guards


- High speed rigid impellor positively spreads up to 21m
- Close coupled impellors at front ensure good distribution of slurry

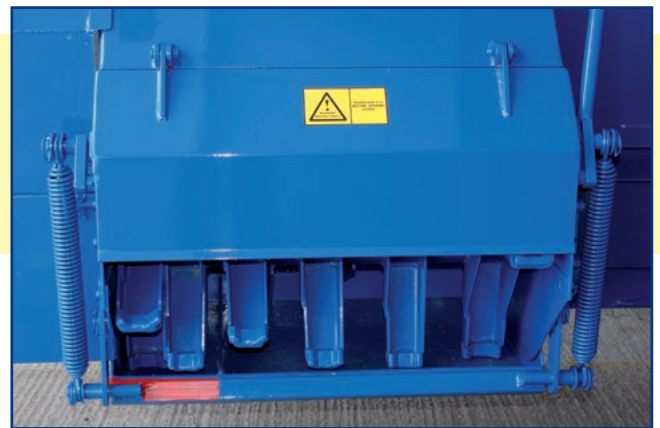

- Steep sides for easy operation of all materials
- Continuous mechanical oscillating side plate to eliminate blocking and bridging assisted by large control door



- Slow rotating, 10 rpm, bottom feed auger mounted on 80mm diameter long lasting nylon bushes
- Shear bolt PTO shaft protects all elements

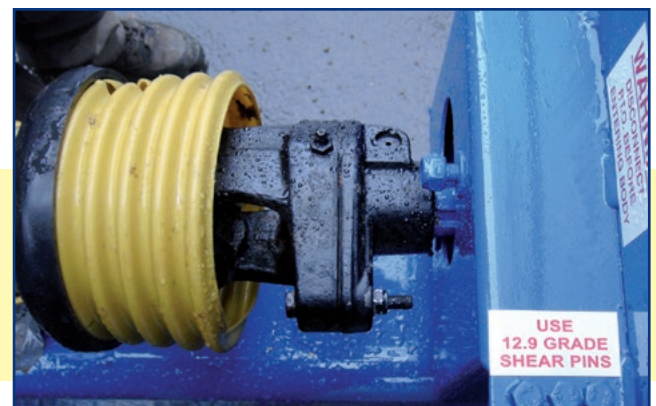

 west



# Spreader Specifications



West Dual Spreader is a firm favourite with farmers and contractors alike.

The advanced features of the Dual were recognised as far back as 1982 when it was awarded the Royal Agricultural Society of England GOLD Medal at the Royal Show. Since then many thousands have been sold in the UK. The design of the Dual, bringing the material forward and weight onto the rear of the tractor, ensures confidence and safety in hilly conditions. These and the various materials that can be handled, the robust build quality and low power requirements have made the West Dual Spreader the market leader with over 50% share in the UK for the last few years.

MODEL	1300	1600	2000	2800	3000
Height	2.12m	2.22m	2.35m	2.50m	2.85m
Width	2.42m	2.64m	2.64m	2.90m	2.90m
Length	4.70m	5.49m	5.66m	6.28m	6.28m
Weight	3.04tonnes	3.40tonnes	3.84tonnes	4.90tonnes	4.91tonnes
Volume	5910litres	7274litres	9092litres	12729litres	13638litres
Volume	5.9m <sup>3</sup>	7.3m <sup>3</sup>	9.1m <sup>3</sup>	12.7m <sup>3</sup>	13.6m <sup>3</sup>
PTO Speed	540rpm	540rpm	540rpm	540rpm	540rpm
Tractor HP Required	52kW(70hp)	59kW(80hp)	70kW(95hp)	97kW(130hp)	97kW(130hp)
Auger Diameter	740mm	740mm	740mm	740mm	740mm
Auger Speed	10.8rpm	10.8rpm	10.8rpm	10.8rpm	10.8rpm
Feed Out Rotor Dia.	630mm	630mm	630mm	630mm	630mm
Feed Out Rotor Width	900mm	900mm	900mm	900mm	900mm
Feed Out Rotor Speed	508rpm	508rpm	508rpm	508rpm	508rpm
Wheel Size	18.4 x 26 x 12ply 8 Stud	23.1 x 26 x 14ply 8 Stud	23.1 x 26 x 16ply 10 Stud	650/65 x 30.5R 10 Stud	650/65 x 30.5R 10 Stud



Harry West (Prees) Limited  
Agricultural Engineers

Lower Heath, Prees, Whitchurch, Shropshire SY13 2BT  
Telephone +44 (0)1948 840465 Fax +44 (0)1948 841055  
email sales@harrywest.co.uk www.harrywest.co.uk

